

2,000 wg

ARCOSA
TANK

Anhydrous Ammonia Tank-(NH₃) The Shorty



Tank Features:

- 2000 NH₃ 60" O.D. x16' 0" O.A.L. 120" leg space
- 8' shorter than standard 2000 NH₃ tank
- Front valve/gauge arrangement with removable guard
- Standard (2) A502-45 gpm 1 1/2" x 1 1/2" Liquid Withdrawal Valve(s)
- Advanced combo 85% percentage Liquid Level/Pressure Gauge
- Standard (2) fill valves



Eyewash Container


Our tanks are equipped with permanently attached stainless steel brackets for top and sidemount eye wash container and safety kit (sold separately).

For more information

888.558.8265

Fabricated to A.S.M.E. code, Section VIII, Division 1.
Complies with CGA G-21
Registered with the National Board

Anhydrous Ammonia Tanks-(NH₃) The Shorty

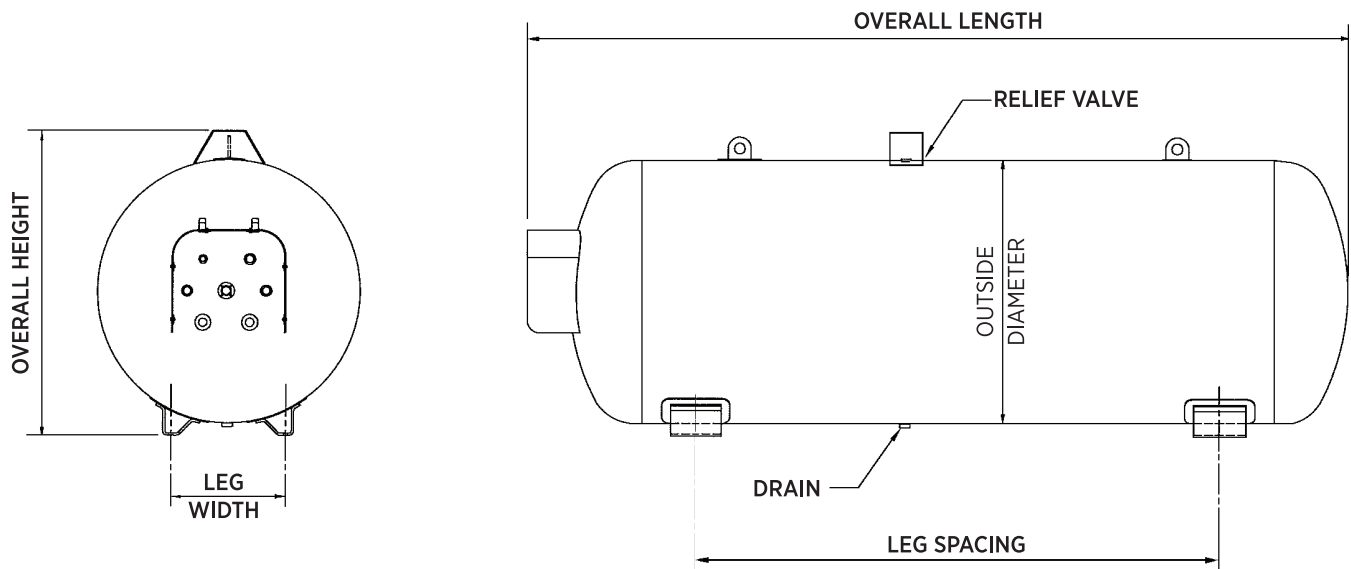


GENERAL SPECIFICATIONS

Rated at 250 psig from -20° F. to 125° F.

Vessel is externally blasted per SSPC-SP6 and externally coated with **ArcClad** Acrylic Polyurethane

All coupling and openings double pass welded and located in the head of the tank

Standard Stainless Steel Float Gauge

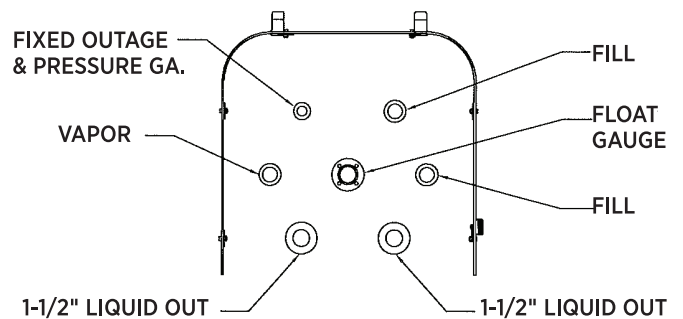

FITTING LAYOUT UNDER FITTING COVER

NH₃ NURSE TANK DIMENSIONAL INFORMATION

Water Capacity	Outside Diameter	Head Type	Overall Length	Overall Height	Leg Width	Leg Spacing	Weight	Quantity in Full Load
2,000 wg. 7,570.0 L	60" 1,524 mm	Ellip	15' - 7 15/16" 4,773.6 mm	5' - 9 1/2" 1,765.3 mm	26 1/8" 663.5 mm	10' - 0" 3,060.7 mm	4,965 lbs. 2,252.1 kg.	3

All vessels dimensions are approximate. Individual vessels may vary.

Rev: April 18, 2016



For more information
888.558.8265